GARDEROS.

DATA SHEET | **R-3700 Series** Robust Multifunctional Router

Application and project description

The Garderos R-3700 Series of routers are certified for in-vehicle use and provide cyber-secure and reliable data connectivity for mobile applications. The R-3700 Series routers provide 2 LAN ports and various wireless WAN interfaces such as Public Cellular and Private LTE. Configurations such as single wireless WAN or alternatively dual wireless WAN are possible. Local WiFi access is optionally possible.


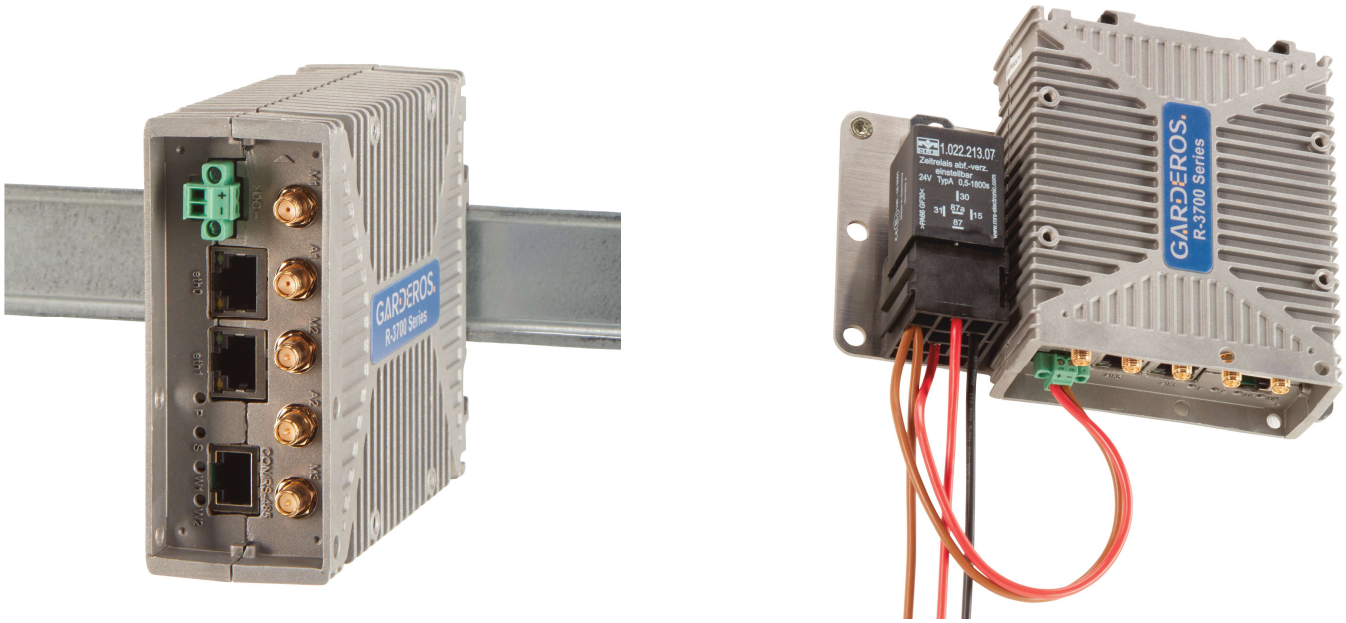


Fig. 1: Garderos R-3700 routers for in-vehicle use.

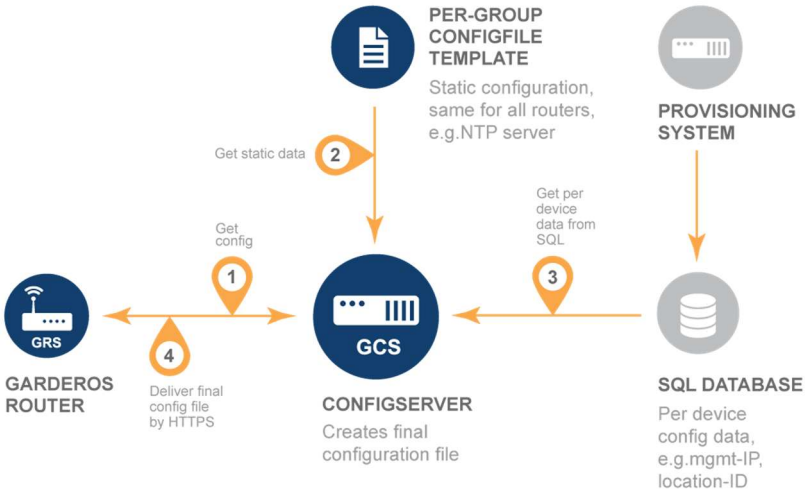

Key features

- Certified for in-vehicle use
- Central administration
- Scalable up to 10,000 routers with one server
- Routers periodically query server for new firmware or configuration
- Hardware and software watchdogs for highest availability
- Standard interfaces in GCS for easy integration with existing infrastructure
- Cyber security by design: secure protocols and functions

GARDEROS.

HARDWARE FEATURES

Casing	Material	Diecast aluminum
	Dimensions (WxHxD)	~44x105x126mm
	Weight	~0.45kg
	Ingress protection	IP42
	IEC protection class	3
	Mounting	Integrated DIN rail clip and mounting holes for external DIN rail clip or mounting bracket
Temperature range		Operating temperature range depends on router model. Please see “ordering information”.
Interfaces on casing	Power connector	Phoenix 2 pin
	Ethernet connector	2x RJ-45
	Serial connector	1x RJ-45 console/data + 1x D-Sub 9 (female) data (optional)
	WWAN antenna connector	up to 4x SMA (female)
	GPS antenna connector	1x SMA (female) (optional)
	WLAN antenna connector	up to 4x RP-SMA (female)
	SIM card slot	2x Mini-SIM (thermoresistant) or 1x Mini-SIM + 1x MFF-SIM chip (optional)
Power supply	Input voltage	12-60 VDC (9,6VDC - 72VDC tolerance)
	Power consumption	~4-12W
Overheating protection	ambient temperature	off CPU >100°C on CPU < 80°C
Serial interface	RS-232 (console)	1x
	RS-485 half-duplex (data)	1x
WAN	Ethernet (see LAN)	
WWAN	Technology	2G/3G/4G [1], 4G/5G [2], 4G [3], 2G/4G [4]
	Passive GPS/A-GPS	Yes (optional) [1, 2]
	Dual WWAN	
LAN	Ethernet	2x 10/100/1000Base-T
	Autosensing	
	Auto-MDIx	
WLAN	Supported standards	1x 802.11ac a/b/g/n
	Dual WLAN	
Other features	Hardware watchdog	Monitors "heartbeats" from router OS. Restarts router in case of software problems.
Certifications	Criteria for EMI immunity and radiation	IEC 61850-3
	Vibration resistant	EN 60068-2-6:2008
	Shock resistant	EN 60068-2-27:2009
Regulations	RoHS, CE, FCC [1, 4]	

[1] **2G/3G/4G Module (CAT 4, global variant*)**
LTE B1, B2, B3, B4, B5, B7, B8, B12, B13, B18, B19, B20, B26, B28, B38, B39, B40, B41
WCDMA B1, B2, B4, B5, B6, B8, B19
EDGE/GPRS/GSM 850/900/1800/1900MHz

[2] **4G/5G Module (5G RedCap, LTE Cat4)**
5G RedCap n1/n2/n3/n5/n7/n8/n12/n13/n14/n18/n20/n25/n26/n28/n30/n38/n40/n41/n48/n66/n70/n71/n77/n78/n79
LTE -FDD B1/B2/B3/B4/B5/B7/B8/B12/B13/B14/B17/B18/B19/B20/B25/B26/B28/B30/B66/B70/B71
LTE -TDD B34/B38/B39/B40/B41/B42/B43/B48

[3] **4G Module (CAT 4, European variant*)**
LTE/LTE450 B3, B7, B20, B31, B72

[4] **2G/4G Module (CAT M1, European variant*)**
LTE/LTE450 B1, B2, B3, B4, B5, B8, B12, B13, B14, B18, B19, B20, B25, B26, B27, B28, B31, B66, B72, B85
EDGE/GPRS/GSM 850/900/1800/1900MHz

*other variants available

GARDEROS.

SOFTWARE FEATURES

Operating system
- Garderos Router Software (GRS) Rel. 3.8

Common
- IPv4, IPv6
- IPv4/IPv6 dual stack
- Multiple IP addresses per interface
- IPv6 prefix delegation

WWAN *)
- PPP over WWAN 4)
- Dual WAN (WWAN, Ethernet, VLAN) 1, 2, 3, 4)
- Dual WWAN (WWAN, WWAN) 1, 2, 3, 4)
- Configurable WWAN network selection 1, 2, 3, 4)
- Configurable WWAN band selection 1, 2, 3, 4)
- Multiple APN 3)
- Intelligent APN selection 1, 2, 3, 4)
- WWAN IPv4 1, 2, 3, 4)
- WWAN IPv6 1, 2, 3)
- WWAN dual stack 1, 2, 3)
- IPv6 prefix delegation 3)
- Dual SIM 1, 2, 3, 4)
- Modem firmware update 1, 3)
- XCAL debugging 3)

WLAN *)
- 802.11ac a/b/g/n
- AP und Client
- 8x SSID (2,4GHz) + 8x SSID (5,5GHz)
- WPA, WPA2, WPA3
- 802.11i (EAP)

Other network interfaces

Bridge
- Layer 2 bridge interface
- STP, RSTP
- IP assignment static IP, DHCP, IPv6 SLAAC, PD

Ethernet
- Configurable link speed
- IP assignment static IP, DHCP, IPv6 SLACC, PD
- Port Mirroring
- 802.1x

Local loop
- Local loop interface
- IP assignment static IP, PD

PPPoE
- IP assignment static IP, PPPoE, IPv6 SLAAC
- PAP and CHAP
- Always on
- Time controlled session termination before provider reconnect

VLAN
- VLAN support (802.1q and priority tagging)
- IP assignment static IP, DHCP, IPv6 SLAAC, PD
- 802.1x

Routing
- Static routes (IPv4, IPv6)
- Static policy routing (IPv4, IPv6)
- Static routes to DHCP gateway (IPv4)
- Dynamic routing protocols RIPv2, OSPFv2, OSPFv3, BGPv4
- Filtering for dynamic routing protocols
- Firewall (IPv4, IPv6, packet filter, connection tracking, bridge filter)
- MAC address filter, Invalid-packet-filter
- NAT (IPv4, IPv6, PAT, 1-to-1, SNAT, port forwarding)
- Synchronous routing
- Configurable MTU
- Path MTU discovery
- TCP MSS adjustment
- Diffserv (set DSCP bits)
- QoS packet prioritization
- Reverse path filter

VPN

GRE
- GRE, GRE IPv6, GRE TAP, GRE TAP IPv6
- Configurable MTU and MTU inherit
- NHRP dynamic tunnel management

mGRE
- Configurable MTU and MTU inherit
- NHRP dynamic tunnel management
- NHRP IPv6

IPsec
- IPsec IPv4, IPv6
- IKEv1, IKEv2
- Authentication: PSK, public key, RSA and ECDSA certificate
- Tunnel and transport mode
- VTI (Virtual Tunnel Interface)
- Encryption algorithms AES, AES192, AES256, CCM+GCM, DES, 3DES
- RSA key length up to 8192 bit, elliptic curves
- Throughput max. 60 Mb/s
- Throughput (3des-sha1-modp1024) 21 Mb/s
- Throughput (aes-sha256-modp4096) 39 Mb/s
- VPN gateway
- Min. number tunnels: 5

L2TP
- Unmanaged L2TPv3 tunnel
- VLAN tagged L2TPv3 tunnel

Open VPN
- PSK, user and certificate authentication
- Min. number tunnels: 5
- OpenVPN Layer 2 and 3
- Bridging OpenVPN Layer 2 Tunnel
- Encryption algorithms AES, AES192, AES256, CCM+GCM, Blowfish, DES, 3DES

MIP
- Mobile IP foreign agent

Router management
- RS-232 management console
- Authentication by TACACS+, RADIUS, password file and public key
- Administrator roles
- Command line interface (CLI)
- Remote configuration file download (HTTP/HTTPS)
- Trigger based configuration selection
- OCSP
- Authentication by HTTP basic auth and certificate
- Remote software updates
- Central bulk management of routers

Services
- Cronjob
- DHCP server (IPv4+IPv6)
- DHCP relay (IPv4+IPv6)
- DHCP snooping (IPv4)
- DHCP address pools per VLAN/interface
- DHCP secure ARP
- DHCP ARP ping before assigning lease
- DHCP accounting (RADIUS)
- Static DHCP (MAC)
- DNS server and proxy
- DynDNS client
- EST (Enrolment over Secure Transport)
- Ethernet port security (sticky MAC detection)
- Hotspot portal
- IPv6 SLAAC daemon
- LLDP
- NMEA 1, 2)
- NTP client, server, MD5, local time source
- SCEP (Simple Certificate Enrolment Protocol)
- SNMPv2 and SNMPv3, monitoring and traps
- SNTP (Simple NTP)
- SSH client, server
- Syslog local, remote, persistent in flash
- Telnet client, server

Other functions
- Configurable LED (also project based)
- Hardware and software watchdogs
- LXC virtualization, busybox and Alpine (project based)
- Status monitor (ping, interface status, IPv6-RS, RX-TX, script)
- Reset to factory defaults
- Customer defined factory defaults
- Security hardening (switch off unsecure features)
- Encrypted configuration
- Serial-to-network proxy (ser2net), IPv4/IPv6, TCP/UDP
- Serial modes: Console, Off and Script
- Scripting interface
- Open APIs for network integration

---

*) Prerequisite is a suitable interface.
1, 2, 3, 4) Please see “Hardware Features”.

ORDERING INFORMATION

Garderos model number: [1, 2, 3, 4] Siehe unter “Hardware Merkmale”.	**Ethernet (10/100/1000 Base-T)**	**RS-232 (console)**	**WLAN (802.11ac a/b/g/n)**	**2G/3G/4G Modul [1] 4G/5G Modul [2] 4G Modul [3] 2G/4G Modul [4]**	**Maximum operating temperature range** (The temperature range may differ depending on the router variant)
R-3701 (2xLAN/WLAN)	2	1	1		-25°C to +70°C
R-3703 (2xLAN/2xWLAN)	2	1	2		-25°C to +70°C
R-3707 (2xLAN)	2	1			-40°C to +75°C
R-3722 (2xLAN/4G or 5G/WLAN)	2	1	1	1	-25°C to +70°C
R-3728 (2xLAN/4G or 5G)	2	1		1	-40°C to +75°C
R-3758 (2xLAN/4G or 5G/4G or 5G)	2	1		2	-40°C to +75°C

Garderos GmbH
Balanstrasse 55
81541 München
Germany

www.garderos.com
Email: info@garderos.com

T: +49 89 189306-0
F: +49 89 189306-98

All trademarks shown are registered trademarks of their respective owners.
Please note that all data and information subject to technical modifications.
© 2025: Garderos GmbH | Data Sheet R-3700 Series | Version 1.17 – December 2025